



NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK

Typical Applications


This switch is suitable for usage in DC - 8.0 GHz 50-Ohm or 75-Ohm systems:

- Broadband
- Fiber Optics
- Switched Filter Banks
- Wireless below 8 GHz

Features

- Broadband Performance: DC - 8 GHz
- High Isolation: 40 dB@ 6 GHz
- Low Insertion Loss: 1.8 dB@ 6 GHz
- Integrated 2:4 TTL Decoder
- 16 Lead 3x3mm QFN Package: 9 mm²

Functional Diagram

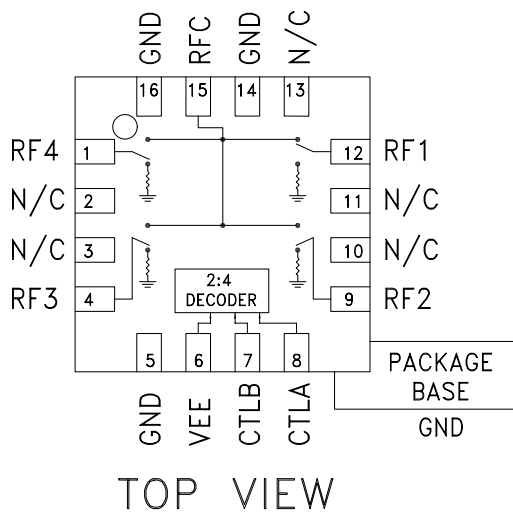


General Description

The HMC344LP3 & HMC344LP3E are broadband non-reflective GaAs MESFET SP4T switches in low cost leadless surface mount packages. Covering DC to 8 GHz, this switch offers high isolation and low insertion loss and extends the frequency coverage of Hittite's SP4T switch product line. This switch also includes an on board binary decoder circuit which reduces the required logic control lines to two. The switch operates using a negative control voltage of 0/-5V, and requires a fixed bias of -5V.


Electrical Specifications, $T_A = +25^\circ \text{C}$, With 0/-5V Control, 50 Ohm System

| Parameter | Frequency | Min. | Typ. | Max. | Units |
|--|---------------|--------------|------|------|-------|
| Insertion Loss | DC - 2.0 GHz | | 1.6 | 2.0 | dB |
| | DC - 6.0 GHz | | 1.8 | 2.2 | dB |
| | DC - 8.0 GHz | | 2.1 | 2.5 | dB |
| Isolation | DC - 2.0 GHz | 43 | 48 | | dB |
| | DC - 4.0 GHz | 36 | 41 | | dB |
| | DC - 6.0 GHz | 34 | 40 | | dB |
| | DC - 8.0 GHz | 31 | 36 | | dB |
| Return Loss | DC - 2.0 GHz | 12 | 15 | | dB |
| | DC - 4.0 GHz | 9 | 12 | | dB |
| | DC - 6.0 GHz | 8 | 11 | | dB |
| | DC - 8.0 GHz | 5 | 8 | | dB |
| Return Loss | “Off State” | DC - 8.0 GHz | 7 | 10 | dB |
| Input Power for 1 dB Compression | 0.5 - 8.0 GHz | 17 | 21 | | dBm |
| Input Third Order Intercept (Two-Tone Input Power = +7 dBm Each Tone) | 0.5 - 8.0 GHz | 37 | 40 | | dBm |
| Switching Characteristics | DC - 8.0 GHz | | 35 | | ns |
| | | | 150 | | ns |


Insertion Loss vs. Temperature

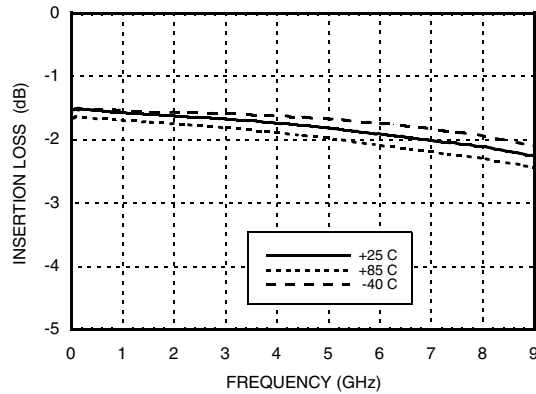


Isolation

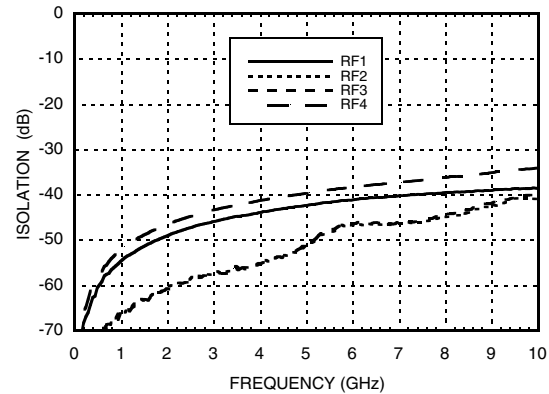


Return Loss

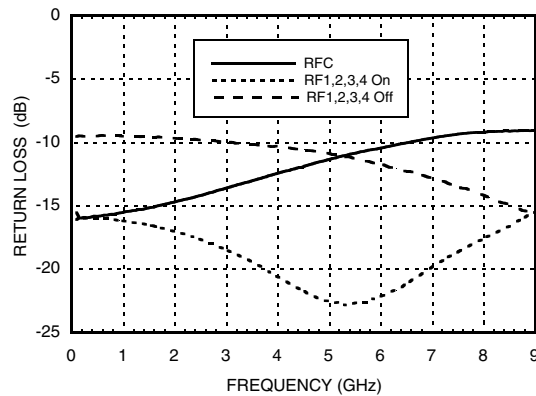

0.1 and 1 dB Input Compression Point

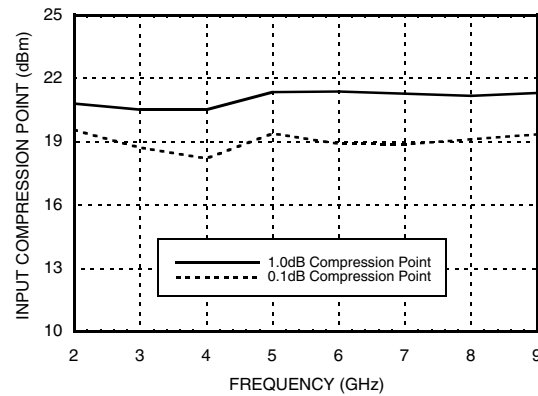

Input Third Order Intercept Point

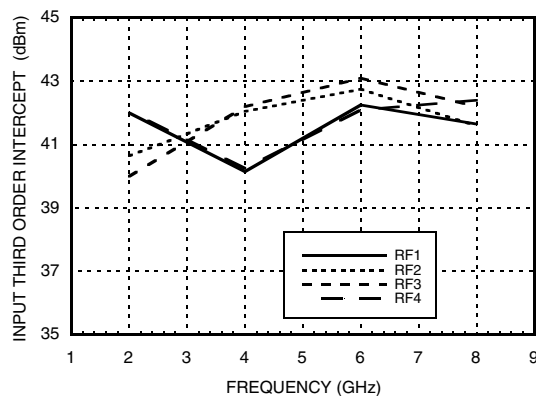

Bias Voltage & Current

| Vee Range = -5.0 Vdc \pm 10% | | |
|--------------------------------|-----------------|-----------------|
| Vee (Vdc) | Iee (Typ.) (mA) | Iee (Max.) (mA) |
| -5.0 | 3.0 | 6.0 |

Control Voltages

| State | Bias Condition |
|-------|------------------------------------|
| Low | -3V to 0 Vdc @ 60 μ A Typical |
| High | -5 to -4.2 Vdc @ 5 μ A Typical |

* Isolation is recorded above insertion loss & measured at output of switch.

GaAs MMIC SP4T NON-REFLECTIVE SWITCH, DC - 8 GHz

Absolute Maximum Ratings

| | |
|--|-----------------------|
| Bias Voltage Range (Vee) | -7.0 Vdc |
| Control Voltage Range (A & B) | Vee -0.5V to +1.0 Vdc |
| Channel Temperature | 150 °C |
| Thermal Resistance (Insertion Loss Path) | 143 °C/W |
| Thermal Resistance (Terminated Path) | 1,030 °C/W |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |
| Maximum Input Power | +24 dBm |
| ESD Sensitivity (HBM) | Class 1A |


Truth Table

| Control Input | | Signal Path State |
|---------------|------|-------------------|
| A | B | RFCOM to: |
| High | High | RF1 |
| Low | High | RF2 |
| High | Low | RF3 |
| Low | Low | RF4 |



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing

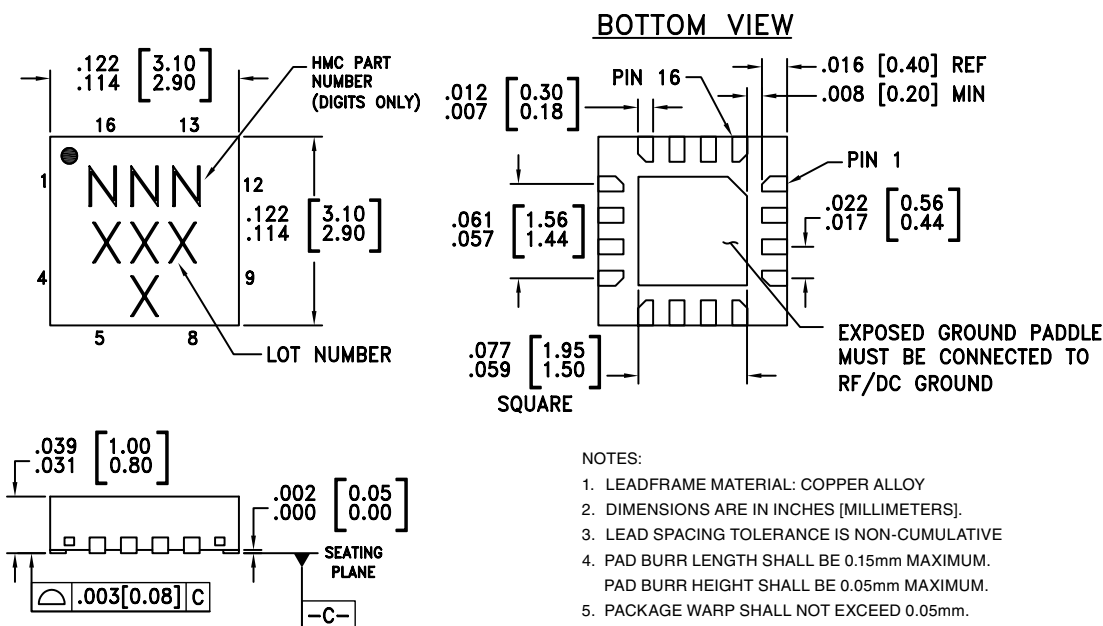

Package Information

| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[3] |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC344LP3 | Low Stress Injection Molded Plastic | Sn/Pb Solder | MSL1 ^[1] | 344 XXXX |
| HMC344LP3E | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 ^[2] | 344 XXXX |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support: Phone: 978-250-3343 or apps@hittite.com



MICROWAVE CORPORATION

v06.1210



HMC344LP3 / 344LP3E

GaAs MMIC SP4T NON-REFLECTIVE SWITCH, DC - 8 GHz


Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|---------------------|----------------------------|---|---------------------|
| 1, 4, 9, 12, 15 | RF4, RF3, RF2, RF1, RFC | This pin is DC coupled and matched to 50 Ohm. Blocking capacitors are required if RF line potential is not equal to 0V. | |
| 2, 3, 10, 11, 13 | N/C | This pin should be connected to PCB RF ground to maximize isolation. | |
| 5, 14, 16 | GND | Package bottom has exposed metal paddle that must also be connected to PCB RF ground. | |
| 6 | VEE | Supply Voltage -5V \pm 10% | |
| 7 | CTLB | See truth table and control voltage table. | |
| 8 | CTLA | See truth table and control voltage table. | |


15

SWITCHES - MULTI-THROW - SMT

TTL Interface Circuit

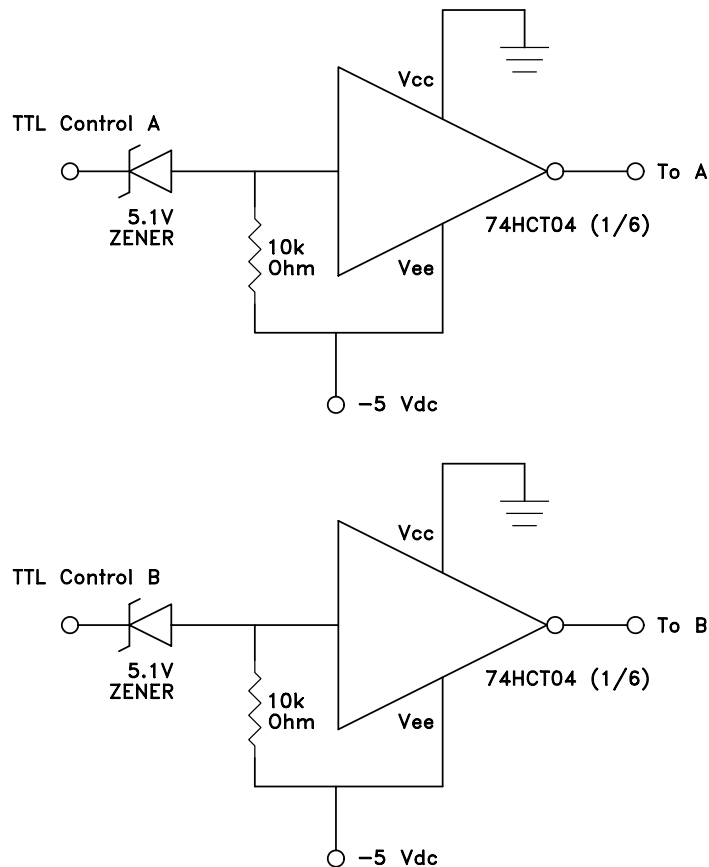

Evaluation PCB

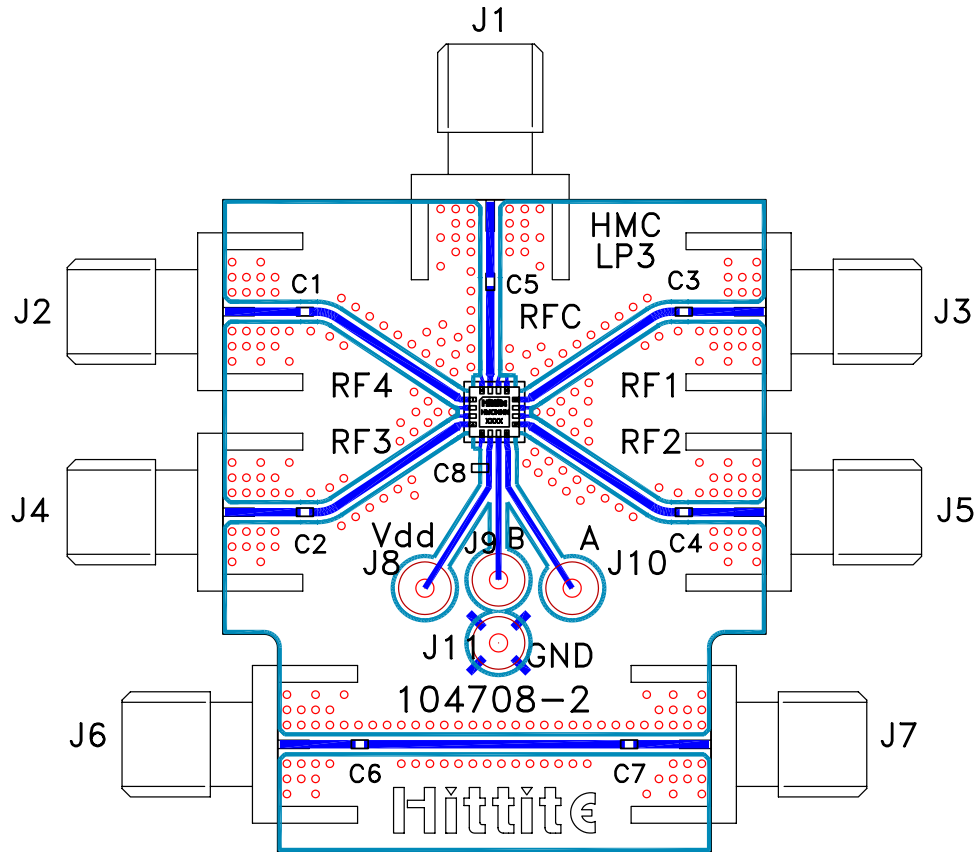

List of Materials for Evaluation PCB 105311 ^[1]

| Item | Description |
|--------------------|---------------------------------------|
| J1 - J7 | PCB Mount SMA RF Connector |
| J8 - J11 | DC Pin |
| C1 - C7 | 0 ohm res, 0402 Pkg. ^[3] |
| C8 | 10k pF Capacitor, 0603 Pkg. |
| U1 | HMC344LP3 / HMC344LP3E SP4T Switch |
| PCB ^[2] | 104708 Evaluation PCB 1.29"x1.55" |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

[3] Select and replace with a suitable capacitor value for applicable operating frequency range.

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines at the RF port should have 50 ohm impedance and the package ground leads and backside ground slug should be connected directly to the ground plane similar to that shown above. The evaluation circuit board shown above is available from Hittite Microwave Corporation upon request.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[HMC344LP3E](#) [HMC344LP3ETR](#) [HMC344LP3](#) [105311-HMC344LP3](#)